



RINO



EM Rino FX Feed Mixers


The Rino FX is a range of feed mixer wagons, most often chosen by small and medium farms. They have rich equipment as standard features such as two-speed gearbox, which generates less power demand.

They are the perfect combination of solid construction and simple operation. The use of high strength materials provides trouble-free use for a long period of time. The wide range of optional equipment and the location of the fodder unloading windows at any position enables the machine to be customised according to the individual needs of the customer.

RINO FX - Auger

Entirely made of S355J2+N quality steel up to 20 mm of thickness.

The innovative, spiral EM Opti-Cut shape shortens the mixing time and power demand by around 15%.

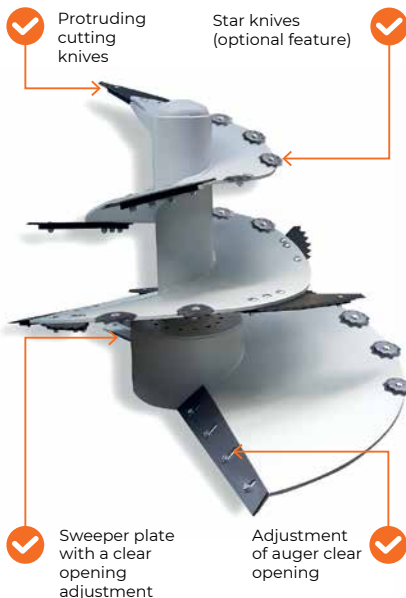

RINO FX - Standard equipment





FX HD Single Auger **10m³ – 14m³**

RINO FX HD Feed Mixers as standard, they have extensive equipment, such as a reduction gearbox which generates less power demand.

They are the perfect combination of a solid structure and simple operation.

RINO FXX HD+ Twin Augers **26m³ – 32m³**

RINO FXX HD+ is known as a durable, solid and reliable feed mixer with reinforced full-length chassis.

- ▶ Equipped as standard with two uniquely designed large-diameter augers with a thickness of 20 mm, giving an efficient and consistent mix every time.
- ▶ Tandem suspension with rear steer axle fitted with 435 / 50-R19.5 tires ensures an even weight distribution and provides greater durability and stability.



Model	Capacity [m3]:	Height [m]	Width [m]	Length [m]	Weight [kg]	Augers	Cutting blades	Window Height [mm]	Frame clearance [mm]
FX 1000 HD	10	2,66	2,55	4,75	3900	1	9	855	450
FX 1200 HD	12	2,96	2,55	4,8	4150	1	9	855	450
FX 1400 HD	14	3,23	2,55	4,85	4350	1	9	855	450
FXX 2200 HD	22	2,85	2,55	7,10	7200	2	18	950	530
FXX 2600 HD+	26	3,21	2,55	7,30	9700	2	18	850	630
FXX 3200 HD+	30	3,61	2,55	7,50	10500	2	18	950	630